



INVEST

with **ALTAVOLA**
DESIGN

LED

PANEL


LIGHT

The LED panel light become a type of fasion recently,because of its slim lamp body,easy installation,low power consumption and low cost maintenance.




It's a trend that the LED panel will take the place of the fluorescent grille light for office lighting. And now we have seen this picutre and we have done something.

We design this series to make it unique to other LED panel from suppliers in the market. The difference is the solid looking shape of the extrusion,and 48W power.It gives as much as 3840lm soft and even light. Every pakage will be supplied with all components for three types of installation:hanging,recessed, laying.



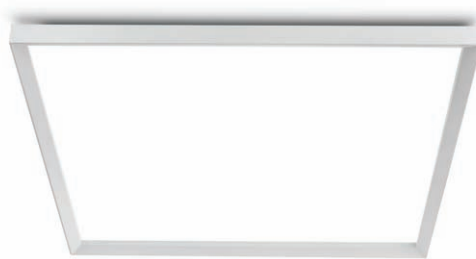

 <p>    </p>	<p> code LQL001-BK / LQL001-WT / LQL001-SL casing aluminum / black / white / silver painting lamping SMD 48W / Ra>80 / 3840LM Beam Acrylic diffuser 2700K/3000K/4000K/6000K installation check installation guide </p>	<p> Hanging Installation/ Laying Down Installation/ Spring Clip Installation Supplied With All Installation Accessories </p>	<p> surface customizable  concrete grey paint similar to RAL7037 </p>
--	--	---	---

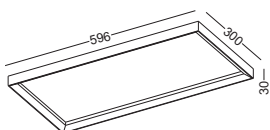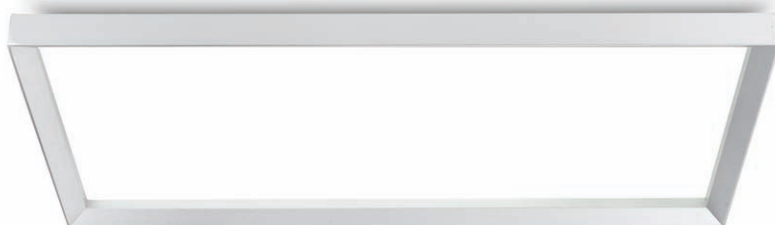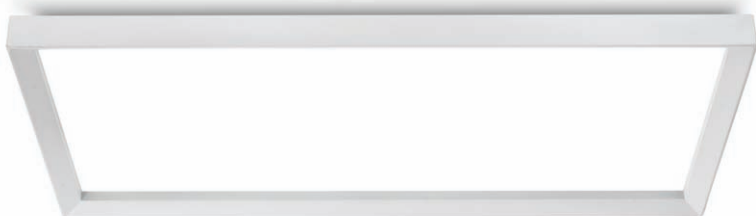




 IP20

code LQL002-BK / LQL002-WT / LQL002-SL
 casing aluminum / black / white / silver painting
 lamping SMD 24W / Ra>80 / 1920LM
 Beam Acrylic diffuser
 2700K/3000K/4000K/6000K


installation check installation guide

Hanging Installation/
 Laying Down Installation/
 Spring Clip Installation
 Supplied With
 All Installation
 Accessories


surface customizable


 concrete grey paint
 similar to RAL7037


LQL001 / LQL002 installation guide

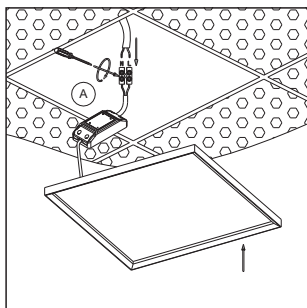

- installed on a 600x600 grille ceiling
 1. switch off the main
 2. connect the power-supply to the main
 3. connect the led panel to the diver with connector
 4. put the panel to the ceiling from one side to the other

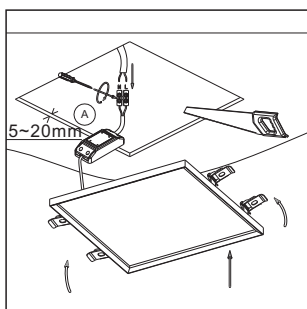


- installed on normal wooden ceiling
 1. cut a square hole on the ceiling
580x580mm for LQL001 series
580x280mm for LQL002 series
 2. switch off the main
 2. connect the power-supply to the main
 3. connect the led panel to the diver with connector
 4. reverse the spring and put the panel to the ceiling

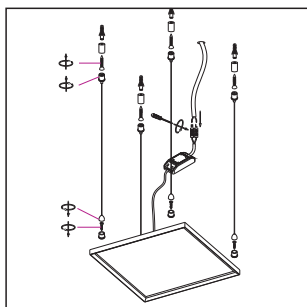

- Hanging installation for LQL001/LQL002
 1. find the accessory package,
fix the four nuts to the panel,
measure the distance between nuts,
fix the hanging cable to the ceiling accordingly
 2. switch off the main
 2. connect the power-supply to the main
 3. connect the led panel to the diver with connector
 4. adjust the height of the panel.



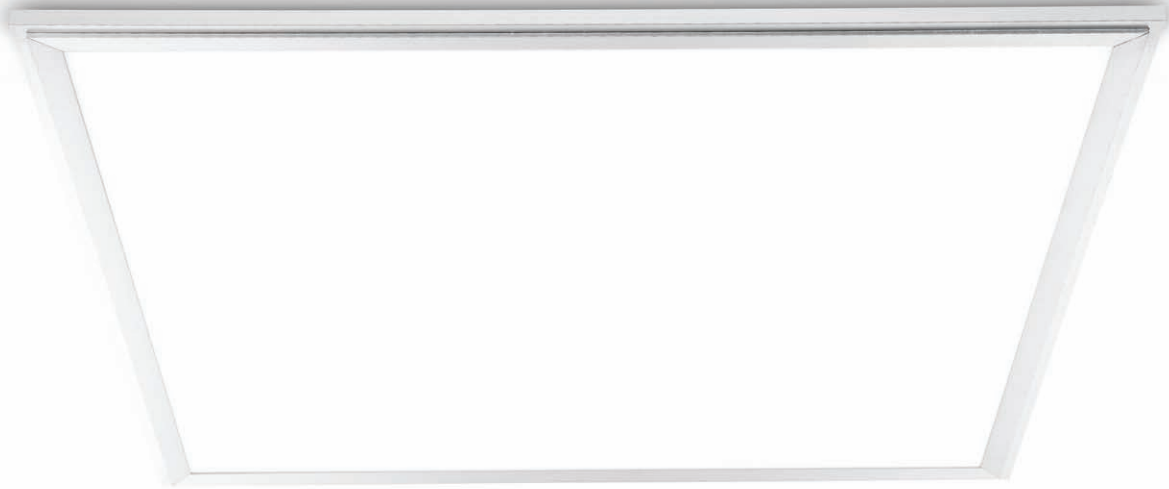

SLIM FIT LED PANNEL LIGHT FOR OFFICE ROOFS 600x600MM






SLIM FIT LED PANNEL LIGHT FOR OFFICE ROOFS 600x300MM

<p> </p>	<p>code LQL014-WT casing aluminum / white painting lamping SMD 48W / Ra>80 / 3840LM Beam Acrylic diffuser 2700K/3000K/4000K/6000K</p> <p>installation check installation guide</p>	<p>installed on a 600x600 grille ceiling</p>	<p>surface customizable</p> <ul style="list-style-type: none"> concrete grey paint similar to RAL7037 black paint equal to RAL9011
----------	---	--	--

<p> </p>	<p>code LQL013-WT casing aluminum / white painting lamping SMD 24W / Ra>80 / 1920LM Beam Acrylic diffuser 2700K/3000K/4000K/6000K</p> <p>installation check installation guide</p>	<p>installed on a 600x300 grille ceiling</p>	<p>surface customizable</p> <ul style="list-style-type: none"> concrete grey paint similar to RAL7037 black paint equal to RAL9011
----------	---	--	--




LED PANEL LIGHT
SPECIALY
FOR KITCHEN
OR BATH ROOF
300X300MM
AND 600X300MM

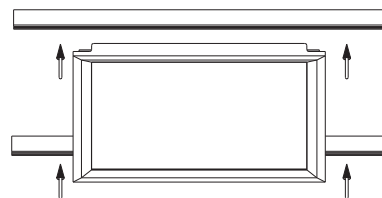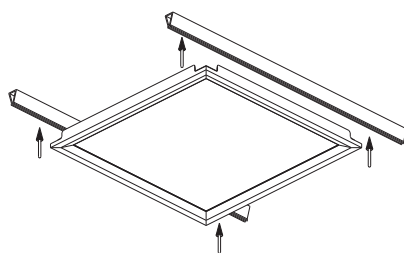

CE IP20

code LQL011-SL
casing aluminum / Anodized silver
lamping SMD 12W / Ra>80 / 1200LM
Beam Acrylic diffuser
2700K/**3000K**/4000K/6000K


installation check installation guide



installed on a
kitchen/bathroom
300x300 grille
ceiling by tighten
up the keel

surface
customizable


■ concrete grey paint
similar to RAL7037
■ white paint
similar to RAL9003

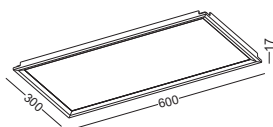

CE IP20

code LQL012-SL
casing aluminum / Anodized silver
lamping SMD 24W / Ra>80 / 2400LM
Beam Acrylic diffuser
2700K/**3000K**/4000K/6000K

installation check installation guide



installed on a
kitchen/bathroom
600x300 grille
ceiling by tighten
up the keel

surface
customizable

■ concrete grey paint
similar to RAL7037
■ white paint
similar to RAL9003

INVEST

with  ALTAVOLA
DESIGN

Biuro Sprzedaży Polska

Piotr Stańczyk

invest@altavola-design.com

tel. +48 696 690 314

International Sales Office

Piotr Stańczyk

invest@altavola-design.com

phone. +48 696 690 314

Verkaufsbüro Deutschland

Piotr Stańczyk

invest@altavola-design.com

tel. +48 696 690 314